

DK 99  
543  
09/807175

PA 163354

REC'D 04 NOV 1999

WIPO

PCT

# THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

October 19, 1999

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.

APPLICATION NUMBER: 60/103,953

FILING DATE: October 13, 1998

## PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)



By Authority of the  
COMMISSIONER OF PATENTS AND TRADEMARKS

*N. Woodson*  
N. WOODSON  
Certifying Officer

A/PROV...

10/13/98  
JCS11 U.S. PTO

Approved for use through 01/31/98. OMB 0651-0037  
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

# PROVISIONAL APPLICATION FOR PATENT COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION FOR PATENT under 37 CFR 1.53 (b)(2).

Docket Number		U 011947-7		Type a plus sign (+) inside this box →	+
INVENTOR(s)/APPLICANT(s)					
LAST NAME	FIRST NAME	MIDDLE INITIAL	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)		
Rasmussen	Erik		Brogardsvej 15 DK-2820 Gentofte Denmark		
TITLE OF THE INVENTION (250 characters max)					
CLEANING AND/OR TREATMENT DEVICE					
CORRESPONDENCE ADDRESS					
LADAS & PARRY 26 WEST 61st STREET NEW YORK, NEW YORK 10023					
STATE	N.Y.	ZIP CODE	10023	COUNTRY	UNITED STATES
ENCLOSED APPLICATION PARTS (check all that apply)					
<input checked="" type="checkbox"/> Specification	Number of Pages	31	<input type="checkbox"/> Small Entity Statement		
<input checked="" type="checkbox"/> Drawing(s)	Number of Sheets	3	<input checked="" type="checkbox"/> Other (specify)	Claims (7)	
METHOD OF PAYMENT OF FILING FEES FOR THIS PROVISIONAL APPLICATION FOR PATENT (check one)					
<input checked="" type="checkbox"/> A check or money order is enclosed to cover the filing fees					FILING FEE AMOUNT (\$)
<input checked="" type="checkbox"/> The Commissioner is hereby authorized to charge filing fees and credit Deposit Account Number:	12-0425				\$150.00

The invention was made by an agency of the United States Government or under a contract with an agency of the United States Government.

☒ No.

☐ Yes, the name of the U.S. Government agency and the Government contract number are:

Respectfully submitted,

SIGNATURE

Date 10 13 1998

TYPED or PRINTED NAME William R. Evans

REGISTRATION NO. (if appropriate)

25858

☐ Additional inventors are being named on separately numbered sheets attached hereto

## USE ONLY FOR FILING A PROVISIONAL APPLICATION FOR PATENT

Burden Hour Statement: This form is estimated to take 2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Box Provisional Application, Assistant Commissioner for Patents, Washington, DC 20231.

E 17.293.9.2846.US

Attorney's Dock t No. U 011947-7

**PATENT**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of: Erik RASMUSSEN  
Serial No.: 0 / Group No.:  
Filed: Examiner:  
For: CLEANING AND/OR TREATMENT DEVICE

Assistant Commissioner for Patents  
Washington, D.C. 20231

**EXPRESS MAIL CERTIFICATE**

"Express-Mail" label number EE729392846US


Date of Deposit October 13, 1998

I hereby certify that the following attached paper or fee  
ACKNOWLEDGMENT POSTCARD  
PROVISIONAL APPLICATION FOR PATENT COVER SHEET  
31 PAGES OF SPECIFICATION  
7 PAGES OF CLAIMS  
3 SHEETS OF DRAWINGS (FORMAL)  
\$150.00 (FILING FEE, CHECK ENCLOSED)

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10, on the date indicated above and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

GERALDINE MARTI

Typed or printed name of person mailing paper or fee



Signature of person mailing paper or fee

**NOTE:** Each paper must have its own certificate and the "Express Mail" label number as a part thereof or attached thereto. When, as here, the certification is presented on a separate sheet, that sheet must (1) be signed and (2) fully identify and be securely attached to the paper or fee it accompanies. Identification should include the serial number and filing date of the application as well as the type of paper being filed, e.g. complete application, specification and drawings, responses to rejection or refusal, notice of appeal, etc. If the serial number of the application is not known, the identification should include at least the name of the inventor(s) and the title of the invention.

**NOTE:** The label number need not be placed on each page. It should, however, be placed on the first page of each separate document, such as, a new application, amendment, assignment, and transmittal letter for a fee, along with the certificate of mailing by "Express Mail." Although the label number may be on checks, such a practice is not required. In order not to deface formal drawings it is suggested that the label number be placed on the back of each formal drawing or the drawings be accompanied by a set of informal drawings on which the label number is placed.

(Express Mail Certificate [B-3])

EE7.293.9.2846US

60103953-101398

Cleaning and/or treatment device

The present invention relates to a cleaning and/or treatment device for cleaning and/or treating surfaces  
5 such as floors, pavements and carpets. The invention particularly relates to a cleaning and/or treatment device using cleaning/treatment solution, wherein the solution is recirculated and thereby used more than one time. The invention also relates to a process of cleaning  
10 and/or treating surfaces using a such device.

Cleaning devices such as floor scrubbers and carpet cleaners using detergent solutions comprising water and detergent (detergent solution is in the following  
15 referred to as solution) are well known in the art. Most of the known cleaning devices uses the solution only once, and consequently uses a lot of solution under operation. The general way of operating a floor scrubber or a carpet cleaning machine is firstly to prepare a  
20 solution. The solution is then placed in a clean solution tank of the machine, and therefrom the solution is fed to the surface (hard floor, carpet e.t.c.) and spread onto said surface. The surface is cleaned using the dissolving power of the detergents, and may further be cleaned by  
25 mechanical means such as a brush. The mixture of dirt and solution is finally removed from the surface e.g. by using a squeegee and transported to a "dirty solution tank" of the machine. The dirty solution must then be disposed of (typically to the sewer). A new solution is  
30 prepared and filled into the machine, and the cleaning process may be continued.

As it appear from the above description, much operation time is required for emptying the dirty solution tank and  
35 refilling the cleaning device with fresh solution. Furthermore, cleaning devices using the solution only

60103953-101398

EE7.293.9.2846US

once, should either have a large supply tank or can only operate for a very short time. Another disadvantages of the above mentioned cleaning devices using solution only once is that a lot of solution comprising unused  
5 detergents is discarded into the environment which is both expensive and polluting to the environment. In order to avoid this problem, a number of cleaning devices having means for recirculating solution have been suggested.

10

A number of patent publications disclose different ways of recycling the solution in order to achieve more operational time and less discharge of dirty solution to the surrounding environment. The methods used are quite  
15 different from each other, and some of the methods have unwanted effects on the quality of cleaning, while still other methods require a lot of maintenance time.

20

US 4,194,263 disclose a scrubber comprising a clean solution tank and a dirty solution tank. A separator is placed in between the clean solution tank and the dirty solution tank to separate the dirty solution into a sludge portion which is returned to the dirty solution tank, and a clean solution which is returned to the clean  
25 solution tank for being reused. The separator is a laminar flow tube settler.

30

A similar scrubber is known from US 4,295,244 In this scrubber the separator has been replaced by a series (a box) of sedimentation chambers.

35

In GB 2,124,478A disclosing a similar scrubber, a separating system comprising a sedimentation chamber followed by centrifugation has been suggested.

60103953-101398

EP 0 224 055 A2 disclose a similar cleaning device comprising a clean solution tank and a dirty solution tank. The two tanks are openly connected, and when passing from the dirty solution tank to the clean solution tank, solution has to pass a first filter with large mesh size and a fine filter for separating dirt from the solution.

In US 5,535,476 a mobile cleaning apparatus with a clean solution tank and a dirty solution tank is disclosed. This apparatus comprising a system of cleaning the dirty solution comprising a sieveplate in the dirty solution tank and a filter bag in the clean solution tank.

In US 3,753,777 a method for cleaning surfaces is disclosed. In this method, a flocculant (polyelectrolytes) is added to the dirty solution in order to create "flocs of dirt", and thereafter these flocs of dirt are removed using a sieve or a filter. Hereafter the solution may be recycled. Adding polyelectrolytes (flocculants) to the solution will often cause less dissolving power of detergents present in the solution since these detergents often chemically bind to the flocculant, and thus cause either increased use of detergents or a less optimal cleaning result.

The main separation principals used for separating dirt and solution in the above described moving cleaning machines are sedimentation and filtration.

30

The "dirt" and debris present in the dirty solution is normally a mixture of particles having all shapes, regular or irregular and typical densities varying from 0.1 to 10 g/cm<sup>3</sup>. For sedimentation to take place sedimentation time and physical conditions (rest) are important factors.

Sedimentation is not an effective separation technique for separating particles with spec.gravities  $< 1.00 \text{ g/cm}^3$ .

5

For example a  $10 \text{ } \mu\text{m}$  sphere (spec. gravity  $1.1 \text{ g/cm}^3$ ) sinking in a slurry or "dirty water" solution (a low solids concentration water suspension with spec. gravity approx.  $1.0 \text{ g/cm}^3$ ) using Stokes law (anticipating laminar

10 movement) results in a Settling velocity  $V_s$ :

$$V_s = D^2 * g * (\rho_p - \rho_w) / 18 * \mu_w = 5.45 * 10^{-6} \text{ m/sek}$$

15 This means that such a sphere will require 1835 seconds to travel 1 cm. From this it can be concluded that the separator require a residence time of the order of about 31 minutes. In the case where the dirty solution is a high solids concentration suspension, the residence time will increase further, due to the hindrance from the  
20 other solids in the solution. Addition of surface active materials, such as detergents may further increase the sedimentation time. Solution consumption in for example floor scrubbers is of the order 1-10 l/min. Thus the volume (size) of the separator unit becomes quite large  
25 and impractical for moving machines when small dirt particles  $< \text{approximately } 10 \text{ } \mu\text{m}$  must be removed. Practically it is not possible to obtain a clear cleaned solution from a dirty solution by using sedimentation separation only. This will be shown later on in the  
30 section "Sedimentation of dirt".

Using filters as described in the above apparatus and methods have other disadvantages. The filters in all the devices described in the above mentioned patent  
35 publications are simple filters having a relatively open mesh. Such filters will not stop all visible particles.

60103953-101398

By applying several such filters in series each having still finer mesh size the solution may become relatively clear as described in US 5,331,713 (White Cons. Ind.), but all traditional filters, as used in the known  
5 cleaning devices, will clog. In the 4-filter-system described in US 5,331,713, the dirt is captured in the filter system and no regeneration of the filters is described. Such "in-dept filter types" require frequent  
10 replacement, even when the particle or "dirt" load in the dirty solution is relatively low. Filtration of high "dirt" loaded solutions is practically impossibly.

The object of the present invention is to provide a cleaning and/or treatment device for cleaning and/or  
15 treating surfaces such as floors, pavements and carpets, which device comprises simple and effective regeneration equipment, and by use of which device used cleaning/treatment solution can be regenerated as a clear cleaned solution.

20 Another object of the invention is to provide a cleaning and/or treatment device which can reuse the solution several time with as little loss of water and detergent/treatment chemicals as possible.

25 Yet another object of the invention is to provide a cleaning and/or treatment device which results in as little pollution to the environment as possible.

30 A further object of the invention is to provide a method of regeneration a dirty solution from a such cleaning and/or treatment device, which method is effective and simple.

35 These and other objects are obtained by the invention as defined in the claims.

60103953-101398



In view of the prior art cleaning devices with recirculating solution, it is very surprising that it is possible to provide filter-systems that effectively  
5 separates dirt and particles from the dirty solution without clogging of the filter means, while the device is operating.

60103953-101399  
The present invention provides a new recycling technology  
10 for cleaning and/or treatment devices. By using the present invention as defined in the claims, collected dirty solution can be cleaned in the filter unit of the device, so that a clear solution determined by visual inspection, can be obtained, and this cleaned clear  
15 solution can be recycled back into the clean solution tank. Water and unused detergent and/or treatment chemicals may be recycled back to the clean solution tank and used again several times.

20 In the following the term "cleaning device" includes devices for cleaning and/or treating surfaces.

When the device is used for treating surfaces the clean solution contains one or more treatment chemicals, such  
25 as chemicals for improving the gloss of a floor or chemicals for providing a carpet with anti-static properties. In some situations, it is preferred that the cleaning solution may contain both treatment chemicals and detergents, provided that the chemicals and  
30 detergents does not interacts in a undesired way.

The cleaning device of the present invention comprise a clean solution tank and a dirty solution tank. The size and shape of these tanks are not important. The cleaning  
35 device further comprise and a movable cleaner head, which cleaner head comprises at least one solution supply

opening for supplying clean solution to a surface and at least one solution recovery opening for recovering dirty solution from a surface. In situations where the cleaning device is not adapted for cleaning or treating carpets, a squeegee may preferably be placed close to the recovery opening. The solution supply opening is connected to the clean solution tank, so that it is in solution communication with the clean solution tank. The solution recovery opening is connected to the dirty solution tank, so that it is in solution communication with the dirty solution tank. The cleaning device further comprises means for supplying solution from said clean solution tank through said supply opening, preferably in the form of gravity or in the form of a pump. Further, the cleaning device comprises suction means for recovering solution through said recovery opening to said dirty solution tank.

The clean solution tank, the dirty solution tank and the cleaner head may have any shape and size. The clean solution tank is preferably not smaller than the dirty solution tank. It is particularly preferred that the clean solution tank and the dirty solution tank have similar size. In some situations, which, however, is not preferred, the dirty solution tank may be constituted by the pipeline that transfer the used solution from the cleaner head to the filter unit. The cleaner head is designed to the type of surface that the cleaning device should clean and/or treat. The cleaner head may preferably be replacable. A preferred cleaner head may comprise any type of scrubbing means e.g. a rotary brush or brushes in connection with the supply opening. The cleaner head further may comprise a squeegee a squeegee placed close to the recovery opening. The preferred size and shape of the cleaner head depends on the type of surface it is adapted to clean. In some devices according

50103953-101398

to the invention the cleaner head is divided into two sections, a first section for supplying fresh solution, and a second section for recovering dirty solution. These two sections may be physically separated from each other.

5

For most types of cleaning devices it is preferred that the means for supplying solution from the clean solution tank through the supply opening is gravity. However, for some types of cleaning devices, such as carpet cleaners the means for supplying solution from the clean solution tank through the supply opening may preferably be a pumping means.

10

The cleaning device may be provided by any size and styles and may preferably comprise wheels. The movable cleaner head may be movable with respect to the solution tanks or in that the whole cleaning device is movable.

15

It is preferred that the cleaning device is a floor scrubber or a carpet cleaner, and except for the filter unit, it may preferably be similar to the cleaners described in the advance brochure "Advance, Commercial and Industrial Cleaning Equipment" 1994 Form No. 28493 8/94 and "Advance, Commercial Cleaning Equipment" 1996 Form No. L0377A, 4/96.

20

25

The central part of the invention is the use of a filter unit which filter unit comprises at least one cross flow-filter. Such a filter unit is able to separate solution from particles to obtain a clear cleaned solution, without clogging of the filter or filters in the filter unit.

30

The filter unit preferably comprise a membrane filter, and more preferably, a cross-flow membrane filter. Such membrane filters are known from the art of separating

35

60103053-101398

proteins, micro-organism and the like from fluids. Membrane filters are also known from the technology of separating oil emulsions used in water-based cooling agents. In this systems, the oil emulsions is retained by  
5 the membrane and water and solutes passes the membrane filter.

~~A membrane filter is in this application defined as a~~  
filter with a microporous structure, which cross-flow  
10 filter restricts the passage of different components in a very specific manner, without creating a filter cake.

It is preferred that the filter unit comprise a solid membrane filter. The membrane may have any thickness e.g.  
15 from 1 mm to 1 cm. The membrane may preferably have pores size between 10 - 10,000 kD or between 0.001 - 5  $\mu$ m. The membrane filter can be made from any suitably material such as ceramics, graphite, metals, metaloxides, papers and polymers. In the present invention it is  
20 particularly preferred that the membrane filter comprises a membrane made of one or more materials selected from polymeric materials, ceramic materials, and metals.

The structure of the membrane may be symmetric (meaning  
25 that the pore diameters does not vary over the membrane cross section) or it may be asymmetric so that the pore diameters increases from one side of the membrane to the other by a factor of up to about 100.

30 Suitably membrane filters are described in DE patent publication 26 53 875, US patent No. 4,915,837, US patent No. 4,726,900, US patent No. 4,990,256 and US patent No. 5,681,469 which is hereby incorporated by reference

35 The membrane filter of the filter unit is preferably packed in a flat, spiral wound, tubular fibre type

50103953-101398

configuration. Most preferred are tubular fibre type configuration, such as "spaghetti" or hollow tubular fibre type configuration.

5 In a cross-flow filter no filter cake formation or "in-depth" filtration takes place. The filter surface should be sufficiently open to allow for water to pass it. It is preferred that the filter surface is sufficiently open to allow for unused detergent to pass it. At the same time  
10 it is preferred that the filter surface should not be more open than it is able to retain essentially all of the particles that cause turbidity in the recycled solution. Thereby visual deterioration of the cleaning result (floor appearance etc.) may be avoided.

15 In a particularly preferred embodiment of the cleaning device of the invention, particularly a floor scrubber or a carpet cleaner, the filter unit further comprises a coarse screen unit for precleaning the dirty solution  
20 before it enters the membrane filter. This coarse screen unit may comprises one or more screens preferably having a mesh width in the range 50 - 2.000  $\mu\text{m}$ . In most situation it is sufficient if the coarse screen unit comprise one or two screens.

25 If the cleaning device should be used in cleaning very dirty surfaces particularly dirty floors such as floors in automobile shops, it is preferred that the coarse screen unit comprise multiple screens e. g. up to 5  
30 coarse screens with decreasing mesh width, arranged in a sandwich structure.

In a preferred embodiment of the invention, the cleaning device further comprise a pumping means for pumping clean  
35 solution from the clean solution tank in a back-flush

50103953-101398

through the filter unit, whereby the filter unit is regenerated.

When the pumping means for pumping clean solution from the clean solution tank in back-flush through the filter unit is operation the pumping means for pumping dirty solution through the filter unit may continue operating.

It is preferred that the pumping means for pumping clean solution from the clean solution tank in a back-flush through the filter unit is controlled by an automatic control unit for starting and stopping said pumping means. More preferably all of the pumps and the valves of the cleaning devise are controlled by an automatic control unit.

Further more it is preferred that the cleaning device is constructed in a way whereby the filter unit, the pumps and the valves of the device are easy of access.

The present invention also comprise a cleaning device in combination with a filtering station as defined in claim 12. In this aspect of the invention the cleaning device is separated from the filter unit, but is adapted to be connected to the filter unit for regeneration of dirty solution, preferably by use of a snap lock devise or a quick connection. Such snap lock devices and quick connections are generally known.

The preferred filter units and constructions of cleaning devices are as described above.

The invention comprise further a process of recycling solution containing detergent and water in a cleaning device or a cleaning device in combination with a filter

886103953-101398

station as defined in the claims 1-22. This process is defined in claims 23-38.

In the process according to the invention clean solution  
5 is transported from the clean solution tank to the cleaner head and through the supply opening of the cleaner head onto the surface to be cleaned e.g. a floor or a carpet. The amount of solution transported through  
10 the supply opening may preferably be from 0.1 to 20 l/min. Used solution is recovered through the recovery opening of the cleaner by use of a suction means, such as a pump or a suction device, and the recovered dirty solution is transported to the dirty tank. It is preferred that at least 60% by vol. of the solution is  
15 recovered. In some preferred embodiments of the invention up to about 100% of the solution can be recovered. In order to recover as much dirty solution as possibly the solution on the surface to be cleaned may be collected by use of a squeegee mounted on the cleaner head. Such  
20 arrangements are generally known from the art.

Dirty solution is transported from the dirty solution tank through a filter unit comprising a cross-flow filter. From this filter unit concentrated dirty solution  
25 is returned to the dirty solution tank, and filtered cleaned solution is transported to the clean solution tank for reuse. The pressure on the dirty solution side of the filter unit may e.g. be 0.5-10 bar. A typical flow rate through the cross-flow filter is 0.1-4.0 l/min/m<sup>2</sup>.

30 With regular intervals , preferably from 1 to 20 times per minute, more preferably from 1 to 10 times per minute the filter unit is preferably regenerated by pumping clean solution from the clean solution tank in a back-  
35 flush through the filter unit.

50103953 101399

The duration of each step of pumping clean solution from the clean solution tank in a back-flush through the filter unit may e.g. have a duration of from 0.5 to 10 seconds. A automatic control unit may preferably regulate the intervals and duration of the back-flush procedure.

The cleaned solution may preferably be recirculated to the clean solution tank at a flow of from 0.1 to 1,000 l/hr. The optimal speed of recirculation depend largely on the solution consumption of the cleaning devise under operation. Preferably the speed of recirculation the clean solution should correspond to the speed of consumption.

The concentration of detergent and/or tretment chemicals in the solution depend on the type of detergent/treatment chemicals, the type of surface that is to be cleaned/treated, and the type of dirt to be removed from this surface. In most situations, however, a detergent solution having a detergent concentration in the range 0.001 - 25 % by weight is suitable for cleaning surfaces.

The invention is described in further details with reference to the following figures and examples:

Figure 1 is a diagram of a recycling system in a cleaning device according to the invention.

Figure 2 is a diagram of the cross-flow membrane filter of the recycling system shown in figure 1.

Figure 3 is a diagram of another recycling system in a cleaning device according to the invention.

Sedimentation of dirt

60103953-101398



- Debris or "Dirt", collected by a floor scrubber using conventional cleaning solutions, has been analysed from a number of different locations. It was found that up to 83% (% w/w) of the dirt particles consists of particles < 20  $\mu\text{m}$ . A summary of the findings from 4 different locations is shown in table 1:

Location		Particles < 20 $\mu\text{m}$
High Voltage Lab.	Heavy industry floor	approx. 26.5%
Engineering Production	Light Industry painted floor	approx. 30.0%
Volvo (Ballerup)	Auto repair shop (tile floor)	approx. 83.0%
Kvickly	Supermarket hard floor	approx. 63.4%

- 10 Table 1: Weight fraction of "dirt particles" smaller than 20  $\mu\text{m}$  in a dirty solution obtained from different locations.
- 15 The corresponding "dirt loads" (grams per litre) that were collected from the same respective locations are shown in table 2.

Location		Total Dirt Load (g/l)
High Voltage Lab.	Heavy industry floor	approx. 36.23 g/l
Engineering Production	Light Industry painted floor	approx. 4.40 g/l
Volvo (Ballerup)	Auto repair shop (tile floor)	approx. 19.10 g/l
Kvickly	Supermarket hard floor	approx.. 3.31 g/l

Table 2: Dirt load in collected "dirty solution" in a floor scrubber in a solution obtained from different locations.

5

From Table 1 it was concluded that a significant part of "dirt" consists of particles smaller than 20  $\mu\text{m}$ . From table 2, it can be seen that it is quite normal that dirt collected from floors comprises relatively large amounts (e.g. 10-20g/l) of particles smaller than 20  $\mu\text{m}$ . Trying to clean a such dirty solution using an ordinary in-depth filters alone will lead to very frequent replacement and filters having very large filter areas would be necessary, assuming that the cleaning devices typically have a 0.5-10 l/min solution consumption.

Hereafter it was investigated how the "dirty solutions" behaved in a sedimentation test in a standard conical beaker. The starting solution (in the clean solution tank) in all tests was a clear solution. The results are shown in table 3:

Location		Sedimentation characteristics
High Voltage Lab.	Heavy industry floor	72hours: No clear phase
High Voltage Lab.	Heavy industry floor	3.000rpm/10min: no clear phase.
High Voltage Lab.	Heavy industry floor	4.000rpm/5min: no clear phase
Engineering Production	Light Industry painted floor	72 hours: No clear phase
Volvo (Ballerup)	Auto repair shop (tile floor)	72 hours: No clear phase

60103953-101398

Kvickly	Supermarket hard floor	120 hours: No clear phase
---------	------------------------	------------------------------

Table 3: Sedimentation test in a conical beaker (1000 ml)  
incl. centrifugation test.

- 5 It was not possible to obtain a clear solution by sedimentation in any case. "No clear phase" means that the upper fraction of the solution still contains much turbidity by visual inspection.
- 10 Hereafter it was tested if a centrifugation could clean the liquid. The "dirty solution" from the "Heavy industry floor" was centrifuged using 3.000 rpm (10 min) and 4.000 rpm (5 min). Still it was not possible to obtain a clear phase in the centrifuged liquid in either case.

15

A preferred cleaning system of the invention

- 20 Fig. 1 and 2 show schematically a preferred cleaning device, and in particular the recycling system thereof.

- 25 Fig. 1 shows a preferred recycling system of a cleaning device according to the invention. The recycling system comprises a clean solution tank S1 and a dirty solution tank S2. A cleaner head CH is placed between the clean solution tank S1 and the dirty solution tank S2. The recycling system comprises a coarse screen F1, a membrane filter unit F2, valves V1, V2, V3, V4, V5 and V6, pumps P1 and P2, and pipelines C0, D0, D1, D2, D3, D4, C1, and
- 30 C2.

The recycling system can work in two modes, a first mode where the dirty solution is cleaned and recirculated, and a second mode where the filter unit is regenerated.

60103953-101398

When starting using the cleaning device, the solution tank S1 is filled with fresh solution. The solution flows through pipeline C0 from the solution tank S1, and down to a cleaner head CH from where it is applied on the floor or surface to be cleaned. The dirty solution mixture is picked up via the cleaner head, and transported through pipeline D0 to the dirty solution tank S2. A coarse screen F1, having relative large mesh size (100-2,000  $\mu\text{m}$ ) is placed inside said dirty solution tank.

When the recycling system works in its first mode, dirty solution is sucked through F1 using the pump P1, and a solution stream flows through pipeline D1. F1 stops large particles from entering the membrane filter unit F2 and valves V3 and V4, and the filter unit and the valves are consequently prevented from clogging. After passing through pipeline D1, the solution flows through membrane filter unit F2. The membrane filter unit comprise a cross-flow membrane as it is shown in fig. 2. The solution flows into the filter unit F2 through opening O1 on the dirty side A, where it passes along the membrane M. Some water and detergent passes through the membrane and enter the clean solution side B, and exit the filter unit F2 through opening O3 into pipeline C1. The concentrated dirt and solution mixture leaves the filter unit F2 through opening O2 into pipeline D2. When the recycling system works in its first mode, valve V3 is closed while the passing through valve V4 is adjusted so as to obtain a suitably pressure difference over the membrane e.g. 0.5 to 10 bar. The dirty solution concentrate returns to the dirty solution tank through pipeline D3. Valve V1 is open, and the solution from pipeline C1 flows freely through valve V1 and the check valve V5, which stops air from entering the filter unit F2. The solution from pipeline C1 flows into the clean

60103953 101398

solution tank. Valve V2 is closed and pump P2 is turned off when the system is working in its first mode. The size of solution stream in pipeline C1 compared to the size of solution stream in pipeline D2 is determined by the back-pressure created by valve V4 and the resistances of the membrane, so that any settlement of dirt on the membrane is avoided. The back-pressure is chosen according to the tolerance of the membrane M, and the establishment of a cross-flow through pipeline D2 large enough to transport all dirt entering the filter through pipeline D1 back to the dirty solution tank S2.

For regular cleaning of the membrane a back-flush mechanism is used. This back-flush mechanism is operating when the system is working in its second mode. When the back-flush mechanism is turned on V3 is opened to reduce the trans-membrane pressure, V1 is closed, V2 is opened and P2 turned on. All of the solution stream passing through pipeline D1 then flows directly through F2 and into pipeline D2. From pipeline D2, it splits into pipelines D3 and D4, from where it flows into the dirty solution tank S2. The pump P2 is started, and a clean solution stream flows from the clean solution tank flows into the pipeline C2, where it is passing through check valve V6 and the open valve V2. The clean solution stream from pipeline C2 flows into the filter unit F2 through opening O4 on the clean side B of the membrane M, and it passes along the membrane M. The clean solution passes through the membrane and enters the dirty solution side A. When the clean solution passes through membrane M from the clean side to the dirty side, the membrane is regenerated. After having passed the membrane, the solution flows along with the dirty solution from pipeline D1 out in pipeline D2.

35

60103953-101398

The construction and design of the membrane filter unit F2 is not crucial for the recycling system to work, this is shown later on in example 5. The cross-flow operation of the filter is important and distinguishes this technology from used methods of in-depth filtration. Thus it is particular preferred that the membrane filter unit uses a cross-flow principle as it is illustrated on fig. 2, where water and detergent (and possibly treatment chemicals) crosses the membrane, while dirt just passes along the membrane.

Fig. 3 shows another preferred recycling system of a cleaning device according to the invention. The device is transported on wheels W, and is supposed to be moved in the direction showed by the arrow when it is in use. The recycling system comprises a clean solution tank S1' and a dirty solution tank S2'. The recycling system comprises a coarse screen F1', a membrane filter unit F2', valves V1', V2', V3', V5' and V6'; pumps P1' and P2'; pump /suction device P3'; and pipelines C0', D0', D1', D2', D3', C1', and C2'.

The recirculating system can work in two modes, as described above with the description of figure 1.

25

When starting using the cleaning device, the solution tank S1\* is filled with fresh solution. The solution flows through pipeline C0' from the solution tank S1', and down to a not shown cleaner head. Dirty solution is recovered using pump or suction device P3, and transported trough pipeline D0' to the dirty solution tank S2'. A coarse screen F1', is placed inside said dirty solution tank.

35

When the recycling system works in its first mode, dirty solution is sucked through F1' using the pump P1', and a

solution stream flows through pipeline D1'. After passing through pipeline D1', the solution flows through membrane filter unit F2'. The membrane filter unit comprise a cross-flow membrane as it is shown in fig. 2 and described above. The clean filtered solution exit the filter unit F2' through pipeline C1'. The concentrated dirt and solution mixture leaves the filter unit F2' through pipeline D2'. When the recycling system works in its first mode, the passing through valve V3' is adjusted so as to obtain a suitably pressure. The dirty solution concentrate returns to the dirty solution tank trough pipeline D3'. Valve V1' is open, and the solution from pipeline C1' flows freely through valve V1' and the check valve V5', which stops air from entering the filter unit F2'. The solution from pipeline C1' flows into the clean solution tank. Valve V2' is closed and pump P2' is turned off when the system is working in its first mode.

For regular cleaning of the membrane a back-flush mechanism is used. This back-flush mechanism is operating when the system is working in its second mode. When the back-flush mechanism is turned on V3' is adjusted to reduce the trans-membrane pressure, V1' is closed, V2' is opened and P2' turned on. All of the solution stream passing through pipeline D1' then flows directly through F2' and into pipeline D2'. From pipeline D2', it flows via D3' into the dirty solution tank S2'. The pump P2' is started, and a clean solution stream flows from the clean solution tank flows into the pipeline C2', where it is passing through check valve V6' and the open valve V2'. The clean solution stream from pipeline C2' flows into the filter unit F2' on the clean side B of the membrane M, and it passes along the membrane M. The clean solution passes through the membrane and enters the dirty solution side A. When the clean solution passes through membrane M from the clean side to the dirty side, the membrane is

60103053-101398

regenerated. After having passed the membrane, the solution flows along with the dirty solution from pipeline D1, out in pipeline D2'.

5

### Example 1

Before a separation test the turbidity (NTU) of the tap water and the solution with different detergent concentrations was measured using a turbidity meter. The turbidity of the cleaning solution as a function of cleaning agent concentration is shown in table 4.

Solution	Turbidity in NTU
Pure tap water	2.18 NTU
0.05% CAA	2.39 NTU
0.10% CAA	2.47 NTU
0.25% CAA	2.05 NTU
0.50% CAA	2.12 NTU
1.00% CAA	2.35 NTU

Table 4: Turbidity in solution(s) with 0-1% of CAA (cleaning agent A).

A floor scrubber (Model BR 1000 manufactured by Nilfisk Advance A/S) was equipped with a sandwich type coarse screen and a tubular type cross flow membrane filter type CFP-1-D-9A manufactured by A/G Technology Inc. The coarse screen had a 405/100  $\mu$ m screen (wire mesh). The coarse screen was built as two large filter bags placed inside one another with spacers around, and suction from the inside of the inner filter bag. A solution of 0.5% cleaning agent A (CAA) was used in the test. A "dirty solution" was collected by a floor scrubber in a



warehouse storage area, and analysed. The analysed dirty solution was hereafter introduced in a membrane separator/filter. The experimental set-up used is shown in fig. 1.

5

It was found that more than 97 % (% w/w) of the dirt particles consists of particles < 20  $\mu\text{m}$ . A summary of the findings from this locations are shown in table 5.

10

Location		Particles < 20 $\mu\text{m}$
Warehouse storage	Light industry concrete floor	Approx. 97.4% w/w ("dirty solution")

Table 5: Weight fraction of "dirt particles" smaller than 20  $\mu\text{m}$  in a dirty solution collected from a warehouse storage area.

15

From table 4, it can be seen that in this case the solution (0-1% cleaning agent) had a turbidity similar to the turbidity of tap water. The turbidity of the "dirty solution" as well as the filtered solution that has been separated by the membrane type CFP-1-D-9A is shown in table 6.

20

Solution	Turbidity in NTU
Pure tap water	2.18 NTU
0.50% CAA	2.12 NTU
filtered solution A	1.13 NTU
"dirty solution A"	$\approx 3.700$ NTU

25 Table 6: Turbidity of solutions in example 1.

60103953-101398

It can be seen that the quality (turbidity) of the filtered solution, is as good as tap water or the 0,5% starting solution used. A particle free filtered solution that can be recycled directly, is clearly obtained.

5

Example 2.

60103953-101398

10 The same floor scrubber incl. a coarse screen and the same membrane as mentioned in example 1 was used. 40 litres of water was mixed with 200 ml "CAA". Floor cleaning in the warehouse storage area (see table 5) was performed. 28 litres of dirty water solution was collected. The dirty solution was diluted with water to 15 about 55 litres volume.

The concentration of "CAA" in the dirty solution (A) was now about 0.25% by vol. The surface tension of the dirty solution was measured. Two samples of the the dirty 20 solution (A) was diluted with water to obtain, respective, a 25% by vol. dilution with water and a 6% by vol. dilution with water of the dirty solution (A). Now recycling of the dirty solution was performed. The permeate was recycled back into the dirty solution tank. 25 The surface tension of the filtered solution (A) was measured. Further more two samples of the filtered solution was diluted with water to obtain, respective, a 25% by vol. dilution with water and a 6% by vol. dilution with water of the filtered solution. The surface tension 30 as a function of detergent concentration was thereby obtained. The surface tension of tap water was measured to be about 49 dyn/cm.

Now about 100 ml CAA was added to the dirty solution 35 tank, and the experiment was repeated. The surface tension of the dirty solution (B), the filtered solution

(B) and the 25% by vol. and 6% by vol. dilutions thereof was measured. The dirty solution (B) had a concentration of about 0.43% of CAA..

- 5 Finally 50 ml CAA was added to the dirty solution tank. and the experiment was repeated. The surface tension of the dirty solution (C), the filtered solution (C) and the 25% by vol. and 6% by vol. dilutions thereof was measured. The dirty solution (B) had a concentration of
- 10 about 0.52% of CAA.

The results are shown in table 7.

Solution	Surface tension "100% by vol."	Surface tension "25% by vol."	Surface tension "6% by vol."
Pure tap water	49 dyn/cm	49 dyn/cm	49 dyn/cm
Dirty solution A	33 dyn/cm	34 dyn/cm	39 dyn/cm
Dirty solution B	30 dyn/cm	32 dyn/cm	39 dyn/cm
Dirty solution C	31 dyn/cm	32 dyn/cm	39 dyn/cm
Filtered solution A	33 dyn/cm	38 dyn/cm	43 dyn/cm
Filtered solution B	33 dyn/cm	36 dyn/cm	42 dyn/cm
Filtered solution C	32 dyn/cm	33 dyn/cm	39 dyn/cm

15

Table 7: Surface tensions of solutions in example 2.

36E10T ES6E0F09

From this table it can be seen that the cleaning agent passes the membrane, and that only a certain amount of the cleaning agent is bound to the dirt. In this case less than 5% of the cleaning agent is used by the dirt and thus more than 95% can be recovered, filtered and recycled. Surprising in this case is that the recycling is limited only by the collection efficiency of solution from the floor.

10

Example 3.

In this example the surface tension of different detergent/dirt/water solutions using different membranes has been investigated. The results are shown in table 8:

The test were performed by circulating artificial dirty solution through a stationary filtration system similar to the system on the cleaning device shown in fig. 1, wherein the cleaner head part was not present. The surface tension was measured in the clean solution before the dirt was added, b) after the dirt was added, and c) in the two tanks when the filtration was terminated (the filtered solution is returned to the clean solution tank and the concentrate is returned to the dirty solution tank).

60103953-101398

Dirt	Detergent	Concen- tration	Membrane	Pore size	IFT dyn/ cm	IFT dyn/cm	IFT dyn/cm	IFT dyn/cm
Type	Name	w/w%	Type		Solu- tion	Dirty solu- tion	filt- ered sol.	Concer- -trate
Artifi- cial	Daren 616	0.42	Spiral	300- kD	32		32.5	
OFW			Spiral	300- kD		34	36.5	34
Artifi- cial	Ajax Ultra	0.29	Spiral	300- kD	30	30	32	
Artifi- cial	Dispex N40	0.0022	Spiral	300 kD	41	53	42	
Artifi- cial	Combifix	1.1	Spiral	300k D	31	30	32	
Artifi- cial	Triton xl00	0.05	Spiral	300k D	35	34	34	
Artifi- cial	Ajax Ultra	0.30	Hollow fiber	500k D	26	27	32	28
Artifi- cial	Ajax Ultra	0.28	Hollow fiber	500 kD	26	26	27	
OFW			Hollow fiber	500 kD		34	41	37
Artifici- al	Lutensol TO8	0.012	Spiral	300 kD	27	28	30	29
OFW	Universal- rens	0.5	Hollow fiber	0.1 $\mu$ m		37	41	
OFW	Universal- rens	0.5	Hollow fiber	0.1 $\mu$ m	27	34	34	

Table 8: Surface-tension of the different detergent/dirt/water solutions (OFW = obtained from cleaning warehouse floors).

From table 8, it can be seen that the low surface tension of the starting solution (see column marked "Solution") is maintained in the clean recovered solution (see column "filtered sol."). This is valid for a range of different commercial detergents. Also different cross flow membrane configurations can be used.

10 Some detergent remains in the concentrate stream. This detergent is mainly bound to the dirt and helps the dirt to be transported out of the membrane filter unit.

15 Example 4.

In this example about 500 ml "CAA (CAA)" is mixed in about 105 litre tap water (TW). The solution (S1) is approx. a 0.5% "CAA" solution. Solution "S1" is filled into the clean solution tank of a floor scrubber according to the invention. The floor scrubber used was a BR 1000 as used in example 1 which was equipped with a recycling system as it is schematic shown in figure 1. The cross-flow separator used was a separator type CFP-1-D-9A.

The characteristics of the solution was measured using both turbidity (NTU) and the surface tension (in dyn/cm) of the solution. Cleaning of a warehouse floor was performed for about 35 min. A permeate flow of about 150 l/hr was obtained. Automatic back-flush in 2 sec/min was used. About 65 litres of filtered solution (FS1) was produced and about 40 litres was remaining in the dirty solution tank. The recycling system incl. the back-flush system is shown in figure 1.

86EFO1"ES6EOT09

Data for the recovered solution and the concentrated dirty solution (DS) are shown in table 9.

5

Solution	Turbidity in NTU	Surface Tension
Tap water = TW	0.13 NTU	65 dyn/cm
0.50% solution= S1	6.24 NTU	30 dyn/cm
Filtered solution = FS1	1.98 NTU	34 dyn/cm
Dirty solution = DS	≈ 775 NTU	NA

Table 9: Turbidity and surface tension of solutions in example 4.

10

Now the 65 litres of the above filtered solution FS1 was mixed with about 20 litres of water (TW) including about 75 ml CAA into the clean solution tank. The volume in the clean solution tank was now about 85 litres and the surface tension of the solution (S2) was measured to about 30 dyn/cm. Cleaning was performed for about 32 min and about 80 litres of recovered and filtered solution (FS2) was collected. Automatic back-flush (2sek/30sek) was used. The surface tension of filtered solution FS2 was measured to about 32 dyn/cm.

15

20

25

Hereafter the 80 litres of the above recovered solution RS2 was mixed with about 20 litres of water (TW) including about 180 ml CAA into the clean solution tank. The volume in the clean solution tank was now about 100 litres and the surface tension of the solution (S3) was measured to about 30 dyn/cm. Cleaning was performed for about 31 min and about 85 litres of filtered solution FS3

856TDT-ES680T09

was collected. A permeate flow of about 135 l/hr was obtained. Automatic back-flush (2sek/30sek) was used.

Data for the all recovered solutions are shown in table 10.

Solution	Turbidity in NTU	Surface Tension
Filtered solution = FS1	1.98 NTU	34 dyn/cm
Filtered solution = FS2	4.39 NTU	32 dyn/cm
Filtered solution = FS3	7.43 NTU	31 dyn/cm

Table 10: Turbidity and surface tension of solutions in example 4.

From example 4, it was found that the cleaning solution could be recovered and filtered multiple times. The quality of the filtered cleaning solution FS3 after 3 times recycling was equal to the original solution S1. The chemical consumption for performing the cleaning was reduced by up to about 85% in this example. The solution consumption was also reduced about 85%. It is quite clear that the effective time that the floor scrubber can be used for cleaning is substantially increased. This is shown in figure 4. The amount of effluent discharged from the floor cleaning operation is also reduced.



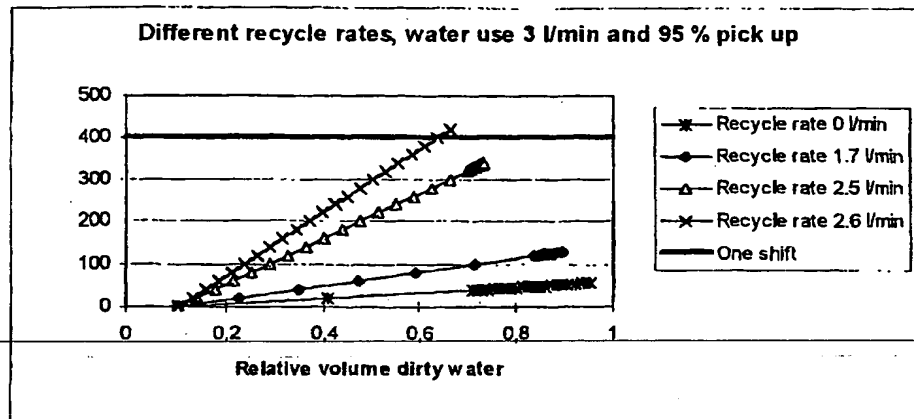


Figure 4: Effective time as a function of recycle rate at 3 litres/min solution, and 95% recovery from the floor.

#### Example 5.

When cleaning a floor, the appearance of the floor after scrubbing is very important. The solution film left on the floor will dry out, and any dry matter might form a stain. In this example 5, the filtered solution was compared to pure solution and dirty solution by gloss measurements.

A floor scrubber as used in example 1 was filled with a 0.5 % solution of detergent CAA. As separator a membrane type CFP-1-D-9A was used. Samples were taken out of the stream from the separator to the clean solution tank after 0, 18 and 30 minutes after the scrubbing and recycling process was started, and further samples were taken from demineralized water without detergent, and dirty solution.

On a clean surface an average gloss on five separate areas was measured, then a 50 $\mu$ m layer of the test samples of the solutions was tape-casted out on the areas. The surface was left to dry and an average gloss was measured again afterwards.

In figure 5 the gloss of the surface areas before and after is shown. It is seen that the dirty solution gives a high reduction in gloss (<30) while the filtered solution keeps the gloss (70-75). The solution quality of the filtered solution as a function of time can also be seen to be stable.

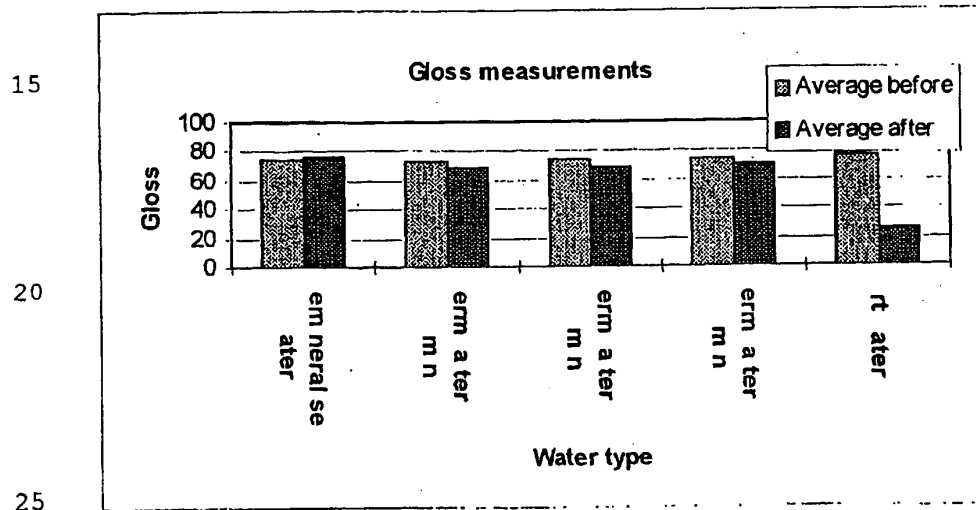


Figure 5: Gloss of surface between before and after drying out solution on the surface.

## Claims:

1. A cleaning and/or treatment device comprising a clean solution tank, a dirty solution tank, and a movable cleaner head, which cleaner head comprises at least one solution supply opening for supplying clean solution to a surface, said solution supply opening being in solution communication with said clean solution tank, and at least one solution recovery opening for recovering dirty solution from a surface, said solution recovery opening being in solution communication with said dirty solution tank, said cleaning device comprising means for supplying solution from said clean solution tank through said supply opening and suction means for recovering solution through said recovery opening to said dirty solution tank, said cleaning device further comprising a filter unit for cleaning dirt from said dirty solution and means for recirculating said cleaned solution to said clean solution tank, wherein said filter unit comprises at least one cross-flow filter, said cross-flow filter preferably being a membrane filter.
2. A device according to claim 1, wherein the device is adapted to supply solution from said clean solution tank through said supply opening by means of gravity or by means of a pump.
3. A device according to claim 1 or 2, wherein said membrane filter comprises a membrane packed in a flat, spiral wound or tubular configuration, preferably a tubular or hollow fibre type configuration.
4. A device according to any of the claims 1, 2 or 3, wherein said membrane filter comprises a membrane having a pore size between 10 - 10,000 kD.

86ET01-ES6E0109

EE7.293.9.2846US

5. A device according to any of the claims 1, 2 or 3, wherein said membrane filter comprises a membrane having a pore size between 0.001 - 5  $\mu\text{m}$ .

5 6. A device according to any of the claims 1-5, wherein said membrane filter comprises a membrane made of one or more materials selected from polymeric materials, ceramic materials, and metals.

---

10 7. A device according to any of the claims 1-6, wherein said filter unit further comprises a coarse screen unit for precleaning the dirty solution before it enters the membrane filter.

15 8. A device according to claim 7, wherein said coarse screen unit comprises one or more screens having a mesh width in the range 50 - 2,000  $\mu\text{m}$ .

20 9. A device according to claim 7 or 8, wherein said coarse screen unit comprises multiple screens arranged in a sandwich structure.

25 10. A device according to any of the claims 1 -9, further comprising a pumping means for pumping clean solution from the clean solution tank in backflow through the filter unit.

30 11. A device according to claim 10, further comprising a control unit for starting and stopping said pumping means for pumping clean solution from the clean solution tank in backflow through the filter unit.

35 12. A cleaning and/or treatment device in combination with a filtering station, said cleaning device comprising a clean solution tank, a dirty solution tank, and a movable cleaner head, which cleaner head comprises at

50103953-101398  
BETTER-ESSENTIALS

- least one solution supply opening for supplying clean solution to a surface, said solution supply opening being in solution communication with said clean solution tank, and at least one solution recovery opening for recovering
- 5 dirty solution from a surface, said solution recovery opening being in solution communication with said dirty solution tank, said cleaning device comprising means for supplying solution from said clean solution tank through
- 10 said supply opening and suction means for recovering solution through said recovery opening to said dirty solution tank, said cleaning device further comprising a first connection pipe adapted to be connected to an inlet pipe on the filtering station for providing a solution communication from said dirty solution tank to said
- 15 filtering station, and a second connection pipe adapted to be connected to an outlet pipe on the filtering station for providing a solution communication from said filtering station to said clean solution tank, said filtering station comprising a filter unit for cleaning
- 20 dirt from said dirty solution and means for recirculating said cleaned solution to said clean solution tank, wherein said filter unit comprises at least one cross-flow filter, said cross-flow filter preferably being a membrane filter.
- 25
13. A device in combination with a filtering station according to claim 12, wherein the device is adapted to supply solution from said clean solution tank through
- 30 said supply opening by means of gravity or by means of a pump.
14. A device in combination with a filtering station according to claim 12 or 13, wherein said membrane filter comprises a membrane packed in a flat, spiral wound or
- 35 tubular configuration, preferably a tubular or hollow fibre type configuration.

60103953-101398

15. A device in combination with a filtering station according to any of the claims 12, 13 or 14, wherein said membrane filter comprises a membrane having a pore size  
5 between 10 - 10,000 kD.

16. A device in combination with a filtering station according to any of the claims 12, 13 or 14, wherein said membrane filter comprises a membrane having a pore size  
10 between 0.001 - 5  $\mu$ m.

17. A device in combination with a filtering station according to any of the claims 12-16, wherein said membrane filter comprises a membrane made of one or more  
15 materials selected from polymeric materials, ceramic materials, and metals.

18. A device in combination with a filtering station according to any of the claims 12-17, wherein said filter  
20 unit further comprises a coarse screen unit for precleaning the dirty solution before it enters the membrane filter.

19. A device in combination with a filtering station according to claim 18, wherein said coarse screen unit  
25 comprises one or more screens having a mesh width in the range 50 - 2,000  $\mu$ m.

20. A device in combination with a filtering station according to claim 18 or 19, wherein said coarse screen  
30 unit comprises multiple screens arranged in a sandwich structure.

21. A device in combination with a filtering station according to any of the claims 1-20, further comprising a  
35

60103953 101398

pumping means for pumping clean solution from the clean solution tank in backflow through the filter unit.

22. A device in combination with a filtering station according to claim 21, further comprising a control unit for starting and stopping said pumping means for pumping clean solution from the clean solution tank in backflow through the filter unit.

23. A process of recycling solution containing water and detergent and/or treatment chemicals in a cleaning and/or treatment device comprising a clean solution tank, a dirty solution tank, and a movable cleaner head, which cleaner head comprises at least one solution supply opening for supplying clean solution to a surface, said solution supply opening being in solution communication with said clean solution tank, and at least one solution recovery opening for recovering dirty solution from a surface, said solution recovery opening being in solution communication with said dirty solution tank, said cleaning and/or treatment device comprising pumping means for supplying solution from said clean solution tank through said supply opening and suction means for recovering solution through said recovery opening to said dirty solution tank, said process comprising the steps of transporting the dirty solution from the dirty solution tank through a filter unit for cleaning dirt from said dirty solution and recirculating the cleaned solution to the clean solution tank, wherein said filter unit comprises at least one cross-flow filter, said cross-flow filter preferably being a membrane filter.

24. A process according to claim 23, solution from said clean solution tank is supplied through said supply opening by means of gravity or by means of a pump.

50103953-101398

25. A process according to claim 23 or 24, wherein said membrane filter comprises a membrane packed in a flat, spiral wound or tubular configuration, preferably a tubular or hollow fibre type configuration.

26. A process according to any of the claims 23, 24 or 25, wherein said membrane filter comprises a membrane having a pore size between 10 - 10,000 kD.

10

27. A process according to any of the claims 23, 24 or 25, wherein said membrane filter comprises a membrane having a pore size between 0.001 - 5  $\mu\text{m}$ .

28. A process according to any of the claims 23-27, wherein said membrane filter comprises a membrane made of one or more materials selected from polymeric materials, ceramic materials, and metals.

29. A process according to any of the claims 23-28, wherein said filter unit further comprises a coarse screen unit for precleaning the dirty solution before it enters the membrane filter.

30. A process according to claim 29, wherein said coarse screen unit comprises one or more screens having a mesh width in the range 50 - 2,000  $\mu\text{m}$ .

31. A process according to claim 29 or 30, wherein said coarse screen unit comprises multiple screens arranged in a sandwich structure.

32. A process according to any of the claims 23-31, further comprising at least one step of pumping clean solution from the clean solution tank in backflow through the filter unit for cleaning said filter unit.

60103053-101398



33. A process according to claim 32, wherein the step of  
pumping clean solution from the clean solution tank in  
backflow through the filter unit is performed at regular  
5 intervals, preferably from 1 to 10 times per minute.

34. A process according to claim 32 or 33, wherein each  
step of pumping clean solution from the clean solution  
tank in backflow through the filter unit has a duration  
10 of from 0.5 to 10 seconds, preferably 1 to 3 seconds.


35. A process according to any of the claims 32, 33 or  
34, wherein the back-flush procedure of pumping clean  
solution from the clean solution tank in backflow through  
15 the filter unit takes 0.5 - 30 seconds per minute.

36. A process according to any of the claims 32-35,  
wherein the back-flush procedure of pumping clean  
solution from the clean solution tank in backflow through  
20 the filter unit is controlled by an automatic control  
unit.

37. A process according to any of the claims 23-36,  
wherein clean solution is recirculated to the clean  
25 solution tank at a flow of from 0.1 to 1,000 l/hr.

38. A process according to any of the claims 23-37,  
wherein the solution is a detergent solution having a  
detergent concentration in the range 0.001 - 25 % by  
30 weight.

United States Patent & Trademark Office  
Office of Initial Patent Examination -- Scanning Division

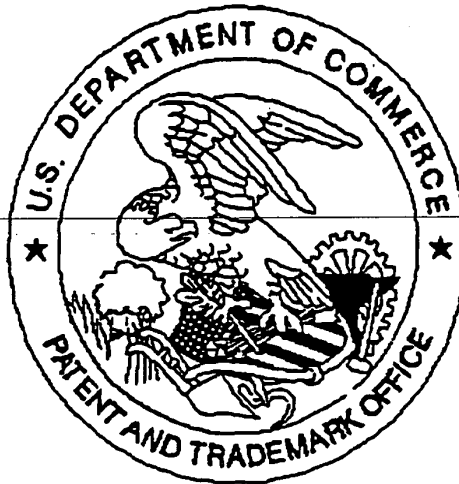

Application deficiencies were found during scanning:

☐ Page(s) \_\_\_\_\_ of Declaration were not present  
for scanning. (Document title)

☐ Page(s) \_\_\_\_\_ of \_\_\_\_\_ were not present  
for scanning. (Document title)

☐ Scanned copy is best available.

60103953 101398


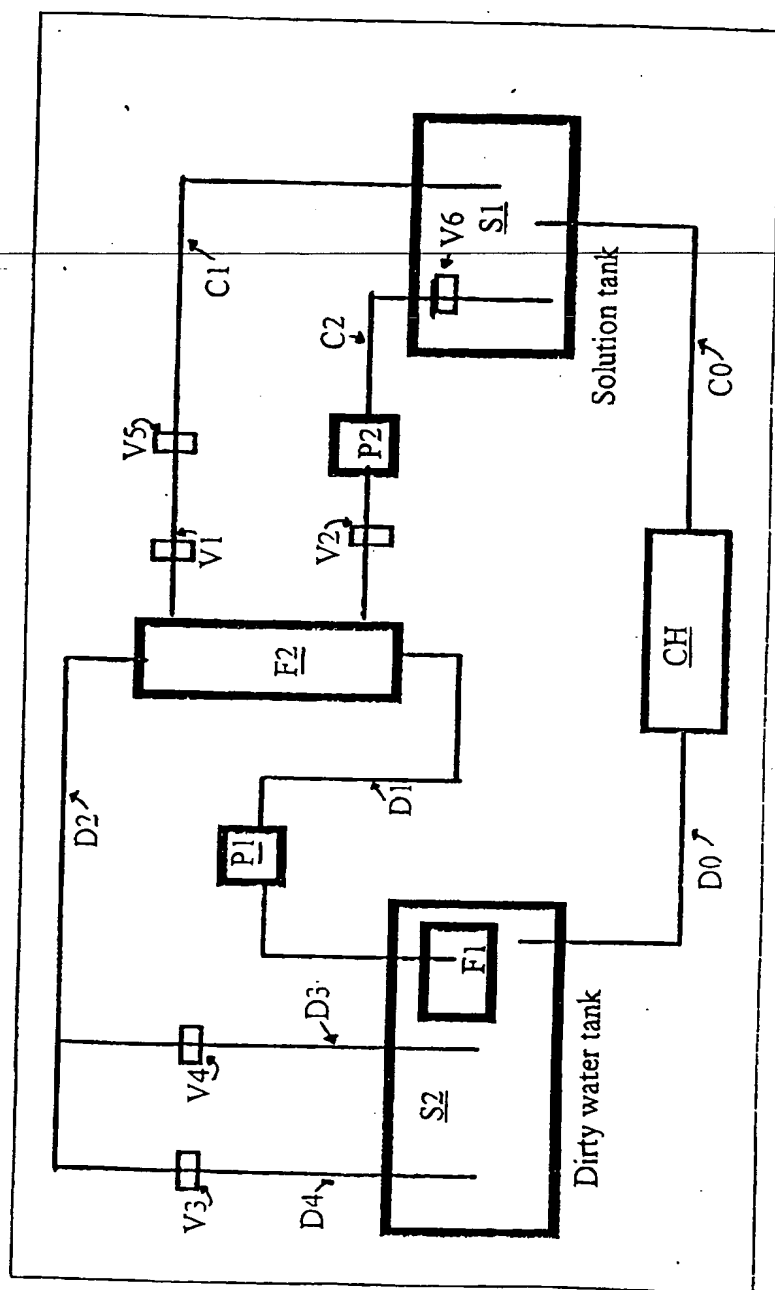



Figure 1: Diagram of solution recycling system.

Figure 2.

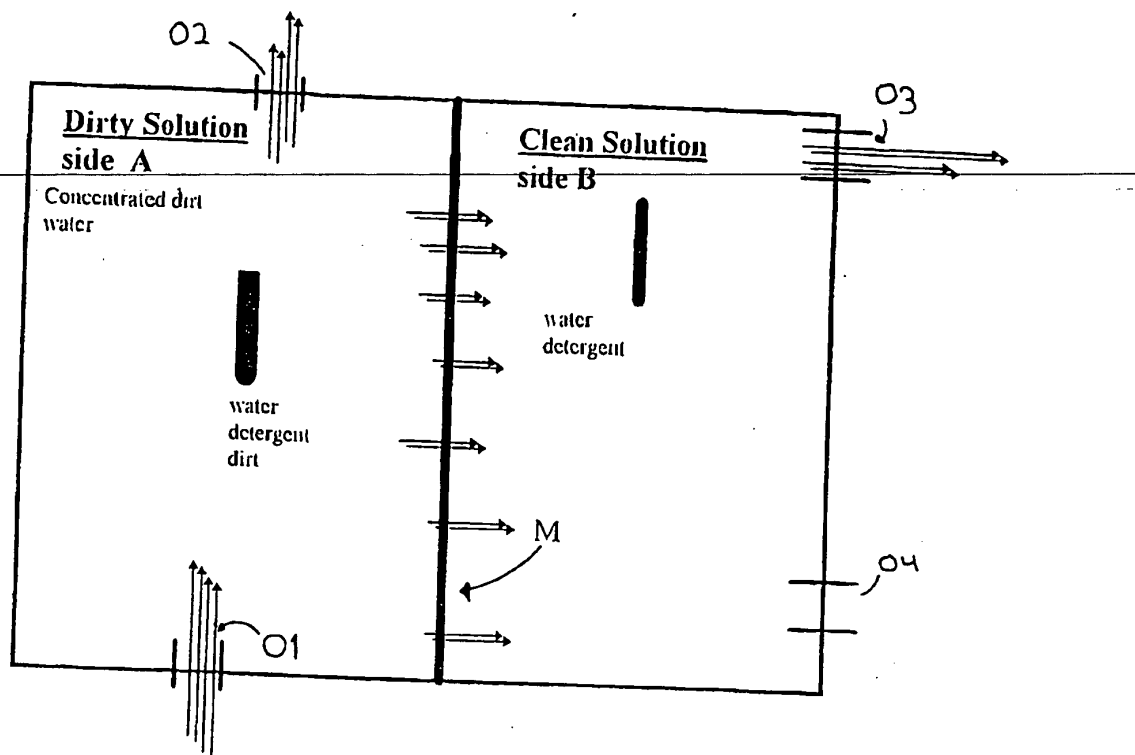

60103953-101398

Figure 3.

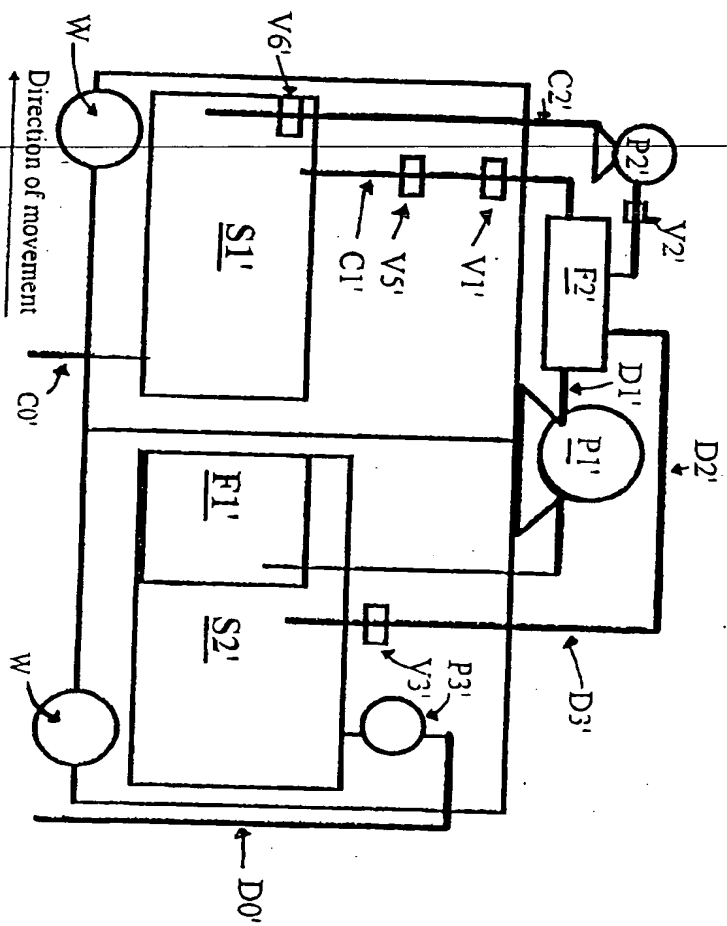

60103957 101398

Main body of the document, appearing to be a blank page with faint horizontal lines.